



SR285R

SANY®

Main performances	Unit	Parameter	Remark
Pile			
Max. drilling diameter	mm	2200	①
Max. drilling depth	m	94/61	②
Rotary drive			
Rated output torque	kN·m	285	
Rotation speed	rpm	5~24	
Crowd system			
Crowd force	kN	260	
Line pull	kN	355	
Stroke	mm	17100	
Main winch			
Lifting capacity	kN	330	
Wire rope diameter	mm	36	
Max. line speed	m/min	70	
Auxiliary winch			
Lifting capacity	kN	90	
Wire rope diameter	mm	20	
Max. line speed	m/min	70	
Mast inclination			
Forward/backward	°	5/90	
Lateral	°	±3	
Main Chassis			
Base engine	/	6WG1	ISUZU
Engine power	kW/rpm	300/1800	
Exhaust emission	/	China Stage III	
Fuel tank capacity	L	680	
Width retracted/extended	mm	3460-4760	
Track shoe width	mm	800	
Swing radius	mm	4465	
Overall machine			
Overall height	mm	25470	
Operating weight	t	105	
Transport width	mm	3475	
Transport height	mm	3625	
Transport length	mm	18695	

- ①: Uncased/cased
②: Friction kelly / inter-locking kelly

Kelly bar		Weight(kg)	Depth(m)	Option
Inter-locking kelly	Φ508×4×16	13100	57	Standard
	Φ508×4×17	13800	61	
Friction kelly	Φ508×6×16	15000	88	
	Φ508×6×17	15800	94	

Note: Drilling depth with bucket 1000 mm long



MULTI-FUNCTION, CONVENIENT SWITCHING

SR285R is a medium-sized multi-functional drilling rig. It can be switched to other construction modes such as low headroom mode, casing mode, and CFA mode. The low headroom mode can be flexibly combined to achieve different heights and meet the working conditions under the bridge, the high voltage line and in the plant.

Convenient switching: multi-functional mast, universal interface, easy to switch among different modes, saving cost.


High efficiency and energy saving: high torque and high crowd force ensure hard layer construction capacity; abundant power, real-time distribution, quick response and more energy saving.

Step drum: only single layer wire rope winding on main winch drum for interlocking bar, no extrusion wear between the ropes, long service life, low cost.

High reliability: working devices are designed under high standard, and go through strict system test with good durability. Multi-functional devices and base machine are designed for accurate and secure connection.

Intelligent control: the locking device visualization technology shows the locking and unlocking process, to reduce Kelly bar wear and accidents. EVI mobile phone exclusive APP, remote monitoring equipment location, efficiency, fuel consumption, etc., one-key service call more convenient.

Convenient maintenance: automatic central lubrication system saves time and effort. The full-length platform and upper carriage guardrail are optional, to provide full protection.

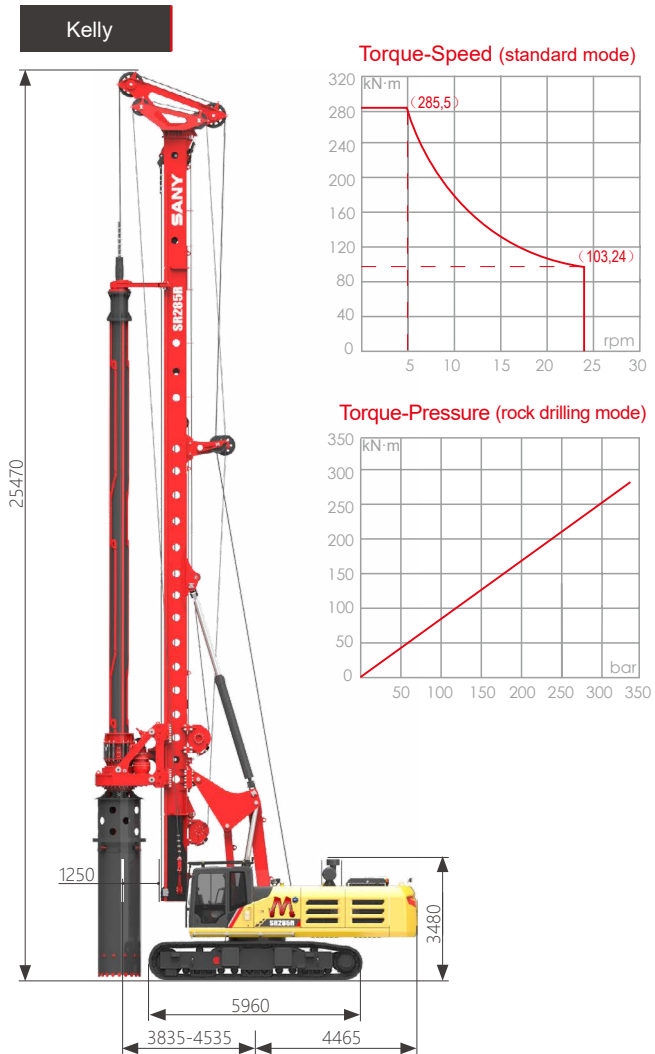

SR285R

SANY®

Low headroom	Unit	Parameter	Remark
Pile			
Max. drilling diameter	mm	2200	
Rotary drive			
Rated output torque	kN·m	285	
Rotation speed	rpm	5~24	
Crowd system			
Crowd force	kN	260	
Line pull	kN	355	
Stroke	mm	4600	
Low headroom-12m			
Overall height	mm	13280	③
Overall height	mm	11655	④
Operating weight	t	89	
Low headroom-15m			
Overall height	mm	16270	
Overall height	mm	14680	
Operating weight	t	93	
Low headroom-18m			
Overall height	mm	18780	
Overall height	mm	18050	
Operating weight	t	96	

Kelly bar		Weight(kg)	Depth(m)	Option
Inter-locking kelly	Φ508×4×9	7650	29	■
	Φ508×4×11	9760	39	●
	Φ508×5×6	7710	22	▲
	Φ508×5×9	8600	36	■
	Φ508×5×11	10600	50	●

Note: ③ the higher location of boom
④ the lower location of boom

Low headroom mode: a few parts, such as kelly were needed.
CFA mode: directly switch to CFA mode by changing a few parts, such as dedicated pulley yoke, balancing rope device, Auger cleaner etc.
Customized construction method: displacement pile device, deeply stirring by single shaft, CFA were needed to be pre-order.



CFA mode	Unit	Parameter	Remark
Pile			
Max. drilling diameter	mm	1200	
Max. drilling depth	m	25.5	
Rotary drive			
Rated output torque	kN·m	285	
Rotation speed	rpm	5~24	
Main winch			
CFA Max.Lifting	kN	1000	
Wire rope diameter	mm	36	
Overall machine			
Overall height	mm	33075	
Operating weight	t	108	

