



SMG200C-8 MOTOR GRADER



Precision hydraulic system

- ◆ The load sensing hydraulic system provides adequate flow during multiple implement operation. The rapid, precise response to control input results in exceptional grading quality.
- ◆ The automatic regulation of pump flow based on load conditions results in increased fuel economy.
- ◆ In the optional "intelligent fan" cooling system, the fan speed is continuously variable the cooling system operating temperature.

Powerful powertrain system

- ◆ Direct drive power shift transmission delivers smooth, responsive shifting.

Comfortable operator environment

- ◆ Provides the operator with a 360 degree field of vision.
- ◆ "Silent ride" engineered cab.

Reliable structure

- ◆ The precision, reliable, low maintenance circle bearing reduces maintenance costs.

Convenient maintenance

- ◆ Conveniently located handrails and steps provide easy access to filters, fluids and service items
- ◆ The centralized lay out of filters are easy for maintenance.

Technical specifications

Model	SMG200C-8 (PDJ200000166)
Power system specification	Engine
	DONGFENG CUMMINS
	Emission
	EPA Tier III
	Model
	QSC8.3
	Rated power (kW)
Dimensions	160
	Rated rotation speed (rpm)
	2200
	Peak torque(Nm)
	980
Load Spec.	Basic: (L*W*H) (mm)
	9005 × 2662 × 3485
	Front and rear axle base (mm)
	6175
Operating device specification	Middle and rear wheel base (mm)
	1524
	Min. Ground clearance (mm)
	370
	Weight of basic type (kg)
	17000
	Length of blade (mm)
Running specification	3660 (12ft) (standard)
	Height of blade(mm)
	610
	Tilt angle
	± 90°
	Turning angle
	± 360°
	Max. Lift above ground (mm)
	460
	Max. Depth of cut (mm)
Tank capacity	715
	Blade tip range
	Front 43° , rear 2°
	Gears
	8 Forward and 6 Reverse
	Forward speed (km/h)
	4/5.5/8/11/17.2/23.4/32.3/46.8
	Reverse speed (km/h)
	3.2/6/8.7/13.6/25.3/37
	Steering angle of front wheel
	Left 50, Right 50°
Operating device specification	Tilt angle of front wheel
	Left 17° , Right 17°
	Articulated steering angle
	Left 20° , Right 20°
	Oscillation angle of front axle
	Up 16° , Down 16°
	Min. Turning radius (m)
Tank capacity	7.5
	Model of tire
	17.5R25
Max capacity of hydraulic oil tank (L)	120
	Max. capacity of fuel tank (L)
	380


Basic & optional configurations

Model	Standard	Optional
SMG200C-8	12ft moldboard	14ft moldboard
	HVAC	/
	/	Front dozer blade
	/	Front scarifier
	/	Rear ripper
	Warning light	/
	Rear camera	/
	/	Automatic leveling system

Dimensions

Model	Name	SMG200C-8
A	Height to top of cab (mm)	3485
B	Height at exhaust stack (mm)	3180
C	Height to top of cylinders (mm)	3110
D	Length - front axle to moldboard (mm)	2500
E	Wheel base - between front and rear axles (mm)	6175
F	Wheel base - between middle and rear wheel (mm)	1524
G	Length - front tire to rear of machine (mm)	9005
H	Overall length - front dozer blade to ripper (mm)	11270
I	Width - rear tire center lines (mm)	2184
J	Width - outside front tires (mm)	2662
K	Width - outside rear tires (mm)	2634
L	Ground clearance at rear axle (mm)	370

Notes: Due to technical and product updates, data on specifications might change without prior notice. The pictures may differ from a real machine.

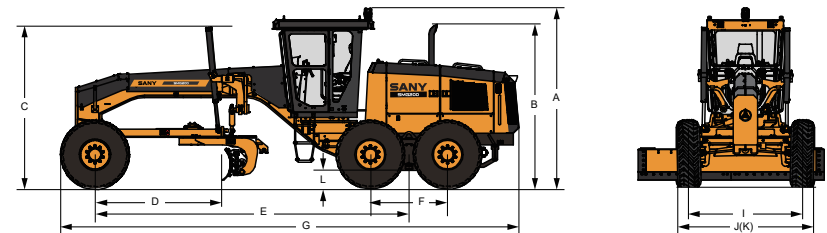

SANY HEAVY INDUSTRY CO. LTD.

SANY Industrial Park, Economic and Technological Development Zone, Changsha, Hunan, China, 410100
 Sales Hotline
 Tel: 0086-731-85835199
 Mail: sales@sanyglobal.com
 Service Hotline
 Tel: 0086-4006098318
 Mail: CRD@sany.com.cn

The product configuration (including technical parameters) is subject to change and the delivered actual machine without notice.

www.sanyglobal.com